

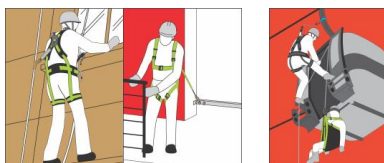
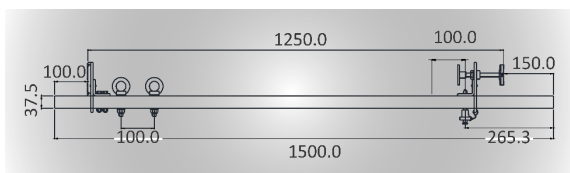
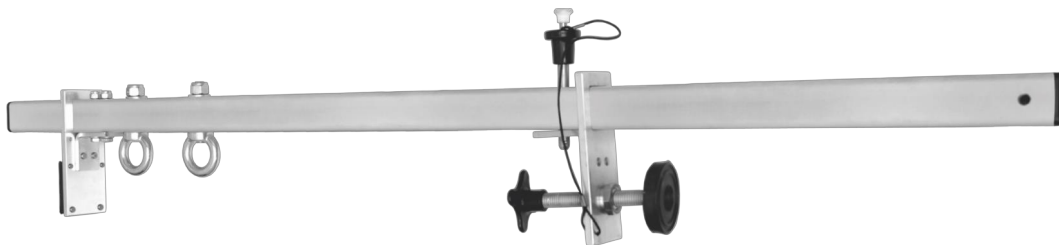
FICHA TÉCNICA

VSG619







FA 60 015 00

P. 1 | 2



HS CODE
7616999099
CARTON SIZE / PCS.
157 X 24 X 10 cm /1
AET (UE) N° 2777/10794-01/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 60 015 00
CE	EN 795:2012 Type B TS 16415:2013 Type B
	x 2
MAT.	
R (kN) / MBS (kN)	13 kN / 20 kN
	600 mm → 1250 mm
	4.75 KG



Nombre d'utilisateurs
 Number of users
Cantidad de usuarios
 Quantità di utilizzatori
Anzahl der Benutzer

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
 Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
 Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)



Fixations à utiliser / Dimensions de la structure d'accueil
 Fasteners to use / Dimensions of the receiving structure
Fijaciones que deben usarse / Dimensiones de la estructura receptora
 Elementi di fissaggio da utilizzare / Dimensioni della struttura ospitante
Zu verwendende Befestigungen / Abmessungen der Aufnahmestruktur