



FICHA TÉCNICA

VSG624



TECHNICAL SHEET FA 60 010 00

WALLUTION, Anchorage point for parapets

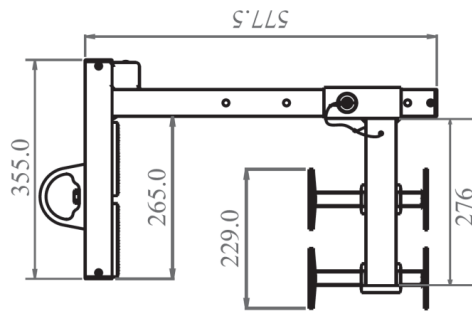

- Transportable anchorage point that is designed to be used in locations where a low parapet wall can receive this anchor.
- Simple and robust design.
- Non-penetrating installation which does not damage the host structure.
- No specific tool is required for its setting-up.
- Wallution can be installed on parapets with dimensions from 60 to 360 mm.
- **Minimum breaking strength > 23 kN.**

Compliance: EN 795:2012 Type B.
Static strength > 12 kN.

Material of components:

Galvanized steel

	CE	Weight:
		9.60 kg

KRATOS SAFETY
689 Chemin du Buclay
38540 Heyrieux – FRANCE

Tel : +33 (0)4 72 48 78 27
Fax : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

HS CODE
83081010
CARTON SIZE / PCS.
70 X 45 X 33 cm / 2
AET N°5556 I3 E1
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
ARTICLE 11 GB07/73551
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom

Frimsal Distribuciones, S.L.

Avda. Canaletes, 45 - 08290 Cerdanyola (Barcelona)
C/ La Ventilla, 37 - 41620 Marchena (Sevilla)

Telf. 902 125 661 - Fax. 902 102 156 - E-Mail; info@frimsal.es
<http://www.frimsal.com>